


1800 W nominal AC input / 120 VAC / external 15 A RMS foldback required

All content, format and spelling/grammar are HOT but minus referenced

INCOMPLETE: first-peak control / total gate-off latency OPEN. AUX produced onboard; external supervisor required.

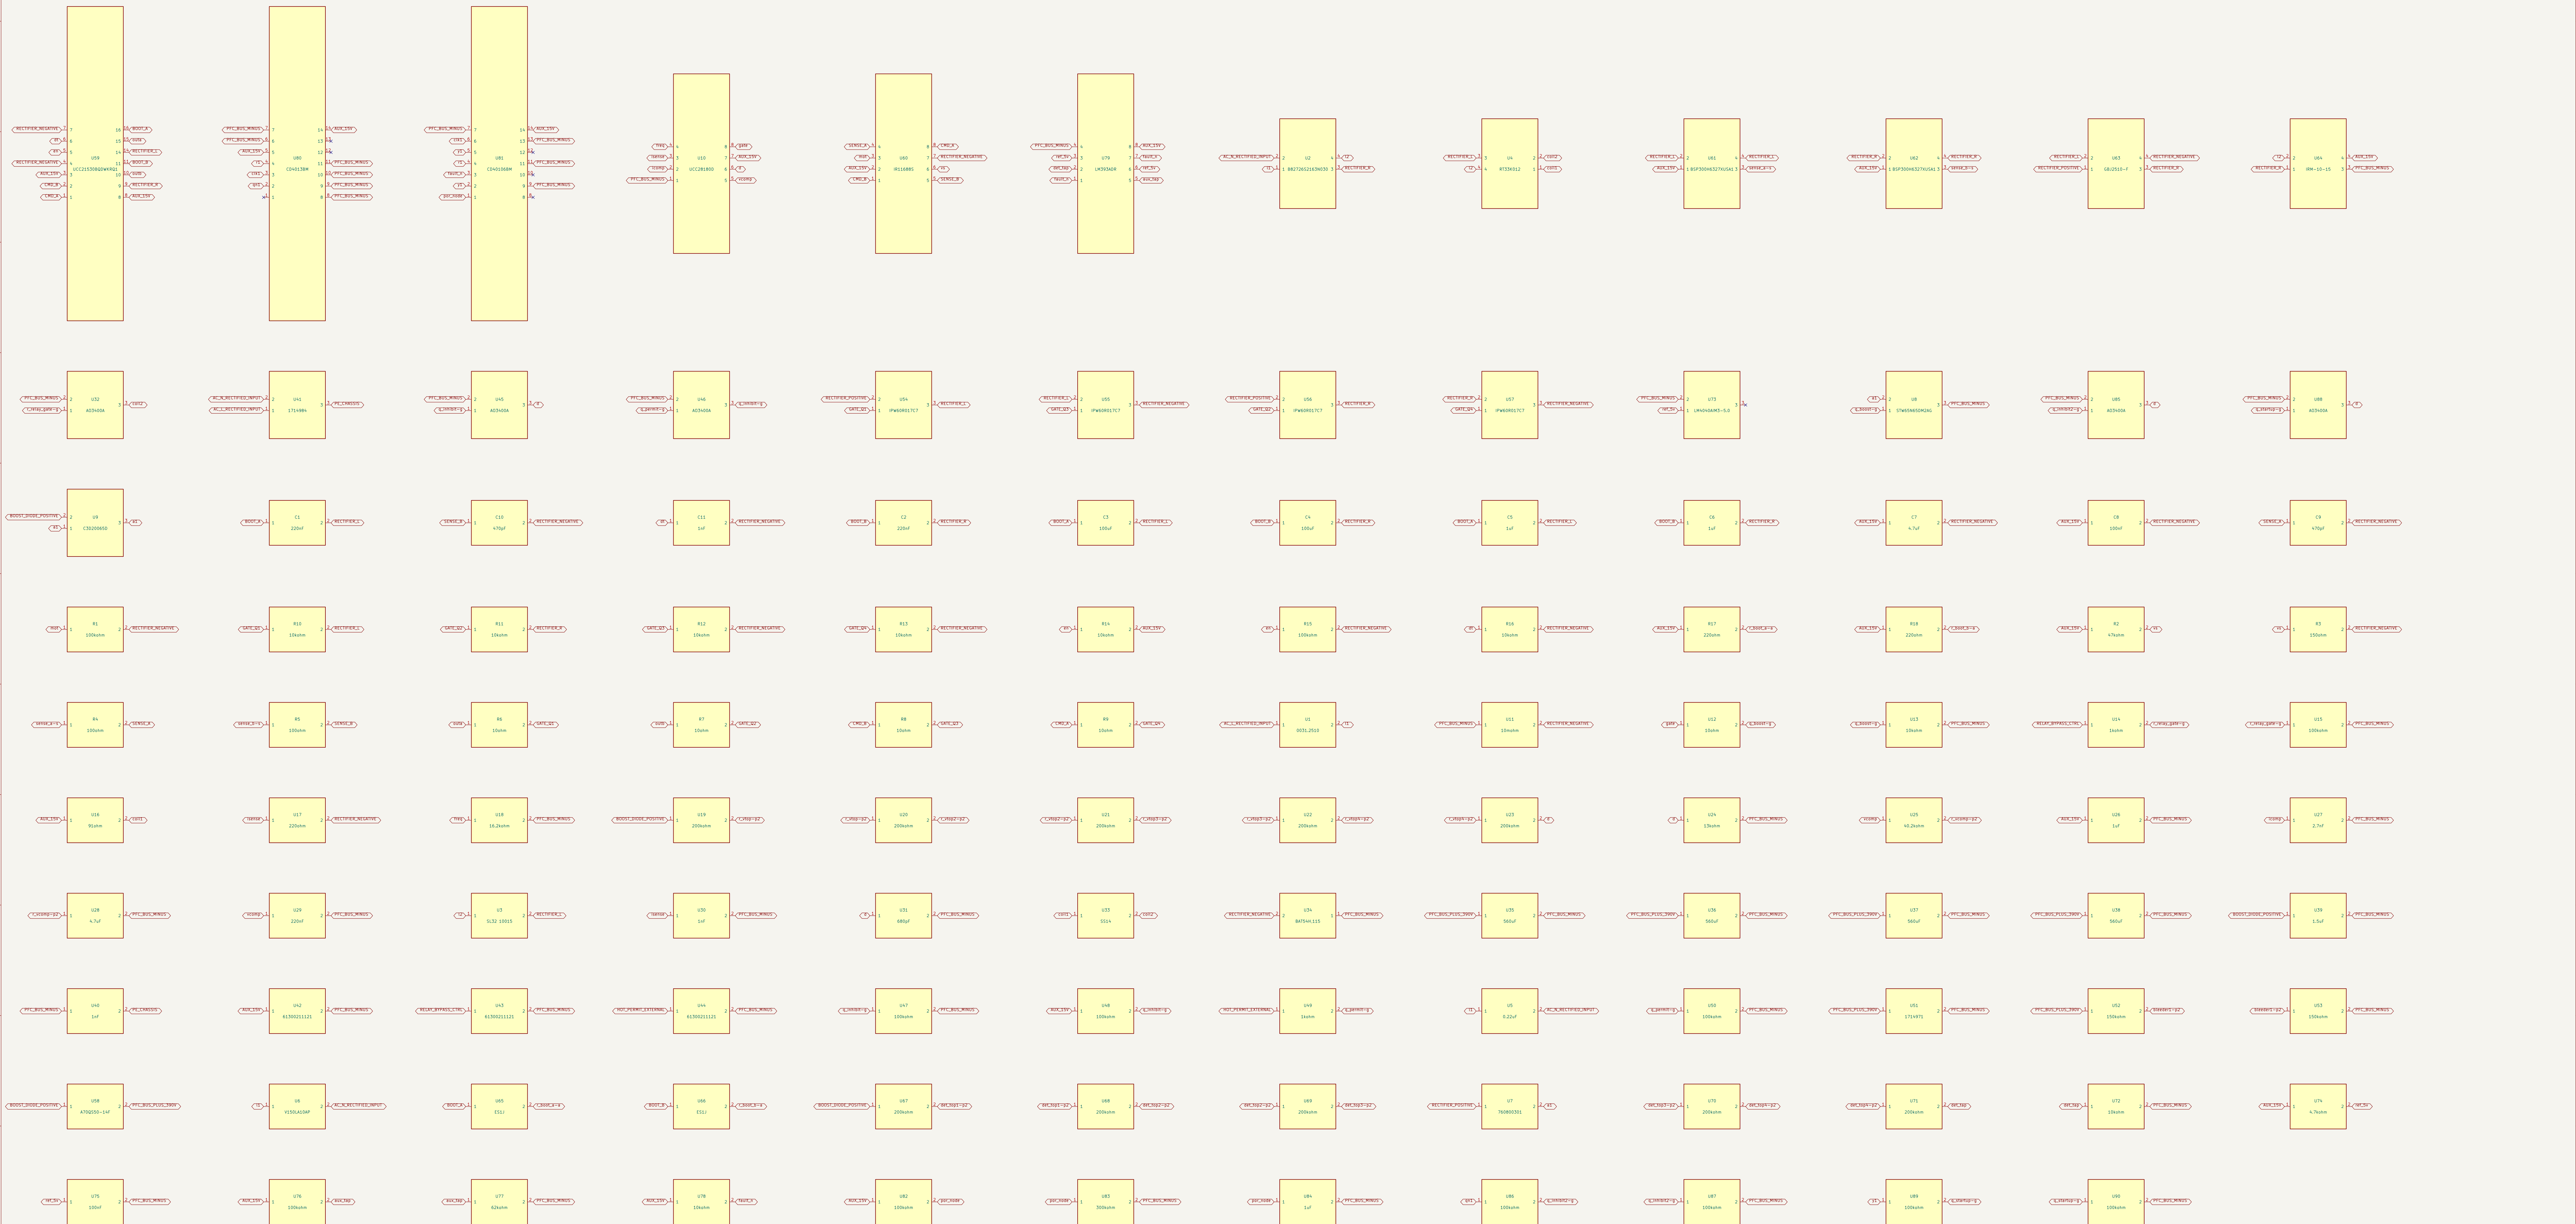

edit elec/src/*.ato and run make schematics
GENERATED -- do not hand-edit
Temper
Sheet: /
File: section.kicad.sch
Title: Active rectifier / fused bank – INCOMPLETE protection
Size: A0 Date: 2026-09-19 Rev: 1.0
Kicad E.D.A. 10.0.4 H: 2/1